



**Ravni odbojni ventil**  
**Check valve**

**Type OV 2**  
**(SB 2687)**

**PN 16**

**STANDARDNA IZVEDBA**  
**STANDARD DESIGN**

**KUĆIŠTE**  
**BODY**

**GG-25/ W.Nr. 0.6025**  
**CAST IRON EN-JL 1040**

**UNUTARNJI DIJELOVI**  
**INNER PARTS**

**NEHRĐAJUĆI ČELIK**  
**STAINLESS STEEL**

**NAZIVNI OTVOR**  
**NOMINAL DIAMETER**

**DN 15-200**

**NAZIVNI TLAK (bar)**  
**NOMINAL PRESSURE**

**PN 16**

**TEMPERATURA**  
**TEMPERATURE RANGE**


**DO 300°C**  
**TO 300°C**

**SPAJANJE**  
**CONNECTION**

**PRIRUBNICA DIN 2501**  
**FLANGES**



**NAMJENA: VODA, PARA, ZRAK,**  
**INERTNI PLINOVI.**

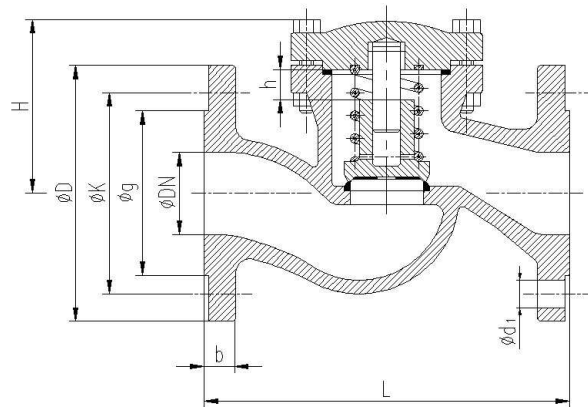

**CONTENTS: WATER, STEAM, AIR,**  
**INERT GASES.**

DN	L	H	øD	øK	ød <sub>1</sub>	n	masa weight kg
15	130	65	95	65	14	4	3
20	150	65	105	75	14	4	3,5
25	160	77	115	85	14	4	4,4
32	180	77	140	100	18	4	6,2
40	200	100	150	110	18	4	8
50	230	100	165	125	18	4	10,5
65	290	117	185	145	18	4	16
80	310	145	200	160	18	8	24
100	350	166	220	180	18	8	29
125	400	185	250	210	18	8	46
150	480	203	285	240	22	8	65
200	600	280	340	295	22	12	122