



Ravni odbojni ventil
Check valve

Type OV 3

PN 25/40

STANDARDNA IZVEDBA
STANDARD DESIGN

KUĆIŠTE
BODY

GS-C25/ W.Nr. 1.0619
CAST STEEL GP240GH

UNUTARNJI DIJELOVI
INNER PARTS

NEHRĐAJUĆI ČELIK
STAINLESS STEEL

NAZIVNI OTVOR
NOMINAL DIAMETER

DN 15-200

NAZIVNI TLAK (bar)
NOMINAL PRESSURE

PN 25/40

TEMPERATURA
TEMPERATURE RANGE


DO 400°C
TO 400°C

SPAJANJE
CONNECTION

PRIRUBNICA DIN 2501
FLANGES



NAMJENA: VODA, PARA, ZRAK, INERTNI PLINOVI.

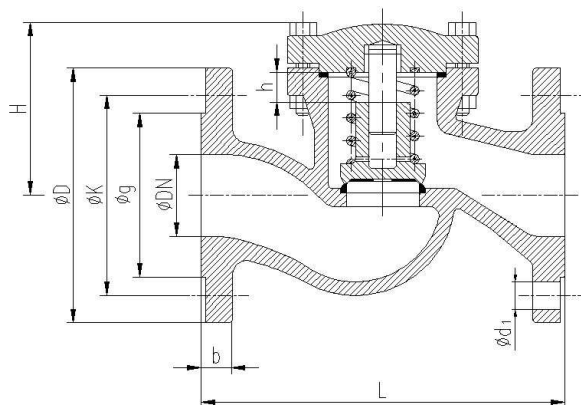

CONTENTS: WATER, STEAM, AIR, INERT GASES.

DN	L 25/40	H 25/40	øD 25/40	øK 25/40	ød ₁ 25/40	n	Masa kg weight 25/40
15	130	76	95	65	14	4	3,8
20	150	82	105	75	14	4	4,5
25	160	85	115	85	14	4	5,9
32	180	100	140	100	18	4	7,5
40	200	120	150	110	18	4	11,5
50	230	115	165	125	18	4	13,5
65	290	135	185	145	18	8	21,4
80	310	149	200	160	18	8	31
100	350	180	235	190	22	8	42,5
125	400	210	270	220	26	8	60
150	480	227	300	250	26	8	80
200	600	273	360/375	310/320	26/30	12	198