



**Sigurnosni ventil sa oprugom**  
**Safty valve with spring**

**Type SO 2**

**PN 16**

**STANDARDNA IZVEDBA**  
**STANDARD DESIGN**

**KUĆIŠTE**  
**BODY**

**GG-25/ W.Nr. 0.6025**  
**CAST IRON EN-JL 1040**

**UNUTARNJI DIJELOVI**  
**INNER PARTS**

**NEHRĐAJUĆI ČELIK**  
**STAINLESS STEEL**

**NAZIVNI OTVOR**  
**NOMINAL DIAMETER**


**DN 25-100**

**NAZIVNI TLAK (bar)**  
**NOMINAL PRESSURE**

**PN 16**

**SPAJANJE**  
**CONNECTION**

**PRIRUBNICA DIN 2501**  
**FLANGES**

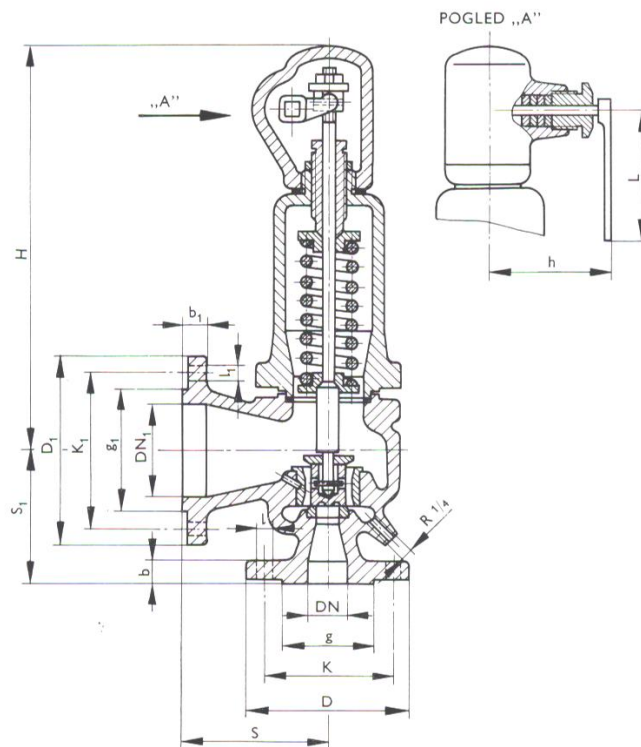

| DN  | øD  | øK  | ød | n | H   | S   | DN <sub>1</sub> | øD <sub>1</sub> | øK <sub>1</sub> | ød <sub>1</sub> | n <sub>1</sub> | S <sub>1</sub> |
|-----|-----|-----|----|---|-----|-----|-----------------|-----------------|-----------------|-----------------|----------------|----------------|
| 25  | 115 | 85  | 14 | 4 | 285 | 95  | 40              | 150             | 110             | 18              | 4              | 105            |
| 32  | 140 | 100 | 18 | 4 | 288 | 100 | 50              | 165             | 125             | 18              | 4              | 110            |
| 40  | 150 | 110 | 18 | 4 | 355 | 115 | 65              | 185             | 145             | 18              | 4              | 130            |
| 50  | 165 | 125 | 18 | 4 | 375 | 125 | 80              | 200             | 160             | 18              | 8              | 145            |
| 65  | 185 | 145 | 18 | 4 | 405 | 140 | 100             | 220             | 180             | 18              | 8              | 150            |
| 80  | 200 | 160 | 18 | 8 | 450 | 155 | 125             | 250             | 210             | 18              | 8              | 170            |
| 100 | 220 | 180 | 18 | 8 | 480 | 175 | 150             | 285             | 240             | 22              | 8              | 180            |