



Sigurnosni ventil sa oprugom
Safety valve with spring

Type SO 3

PN 16/40

STANDARDNA IZVEDBA
STANDARD DESIGN

KUĆIŠTE
BODY

GS-C25/ W.Nr. 1.0619
CAST STEEL GP240GH

UNUTARNJI DIJELOVI
INNER PARTS

NEHRĐAJUĆI ČELIK
STAINLESS STEEL

NAZIVNI OTVOR
NOMINAL DIAMETER



DN 100-200 (PN 16)
DN 25-100 (PN 40)

NAZIVNI TLAK (bar)
NOMINAL PRESSURE

PN 16
PN 40

SPAJANJE
CONNECTION

PRIRUBNICA DIN 2501
FLANGES

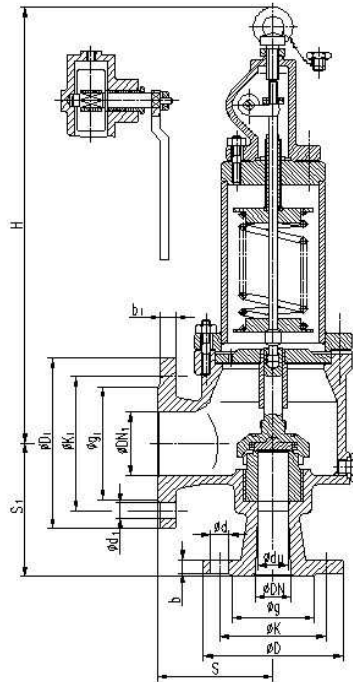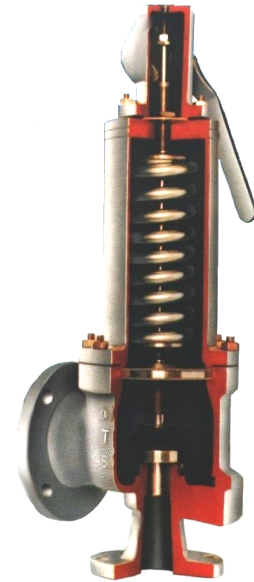

DN	øD	øK	ød	n	H	S	DN ₁	øD ₁	øK ₁	ød ₁	n ₁	S ₁	Masa Weight kg
25	115	85	14	4	417	105	40	150	110	18	4	115	15
32	140	100	18	4	428	110	50	165	125	18	4	125	19
40	150	110	18	4	473	120	65	185	145	18	8	135	26
50	165	125	18	4	610	140	80	200	160	18	8	150	35
65	185	145	18	8	629	140	100	220	180	18	8	160	47
80	200	160	18	8	707	160	125	250	210	18	8	175	70
100	235	190	22	8	756	180	150	285	240	22	8	200	101
125	250	210	18	8	826	200	200	340	295	22	12	200	138
150	285	240	22	8	1100	205	200	340	295	22	12	250	163
200	340	295	22	12	1200	280	300	445	400	22	12	320	192