



Termodinamički odvajač kondenzata
Steam trap-thermodynamic

Type TOK 8

PN 0,5-100

STANDARDNA IZVEDBA
STANDARD DESIGN

KUĆIŠTE
BODY

C22 / W.Nr. 1.0402
CARBON STEEL

UNUTARNJI DIJELOVI
INNER PARTS

NEHRĐAJUĆI ČELIK
STAINLESS STEEL

NAZIVNI OTVOR
NOMINAL DIAMETER

DN 10-25 (3/8"-1")

NAZIVNI TLAK (bar)
NOMINAL PRESSURE

PN 0,5-100


TEMPERATURA
TEMPERATURE RANGE

DO 400°C
TO 400°C



NAMJENA: VODA, PARA

CONTENS: WATER, STEAM

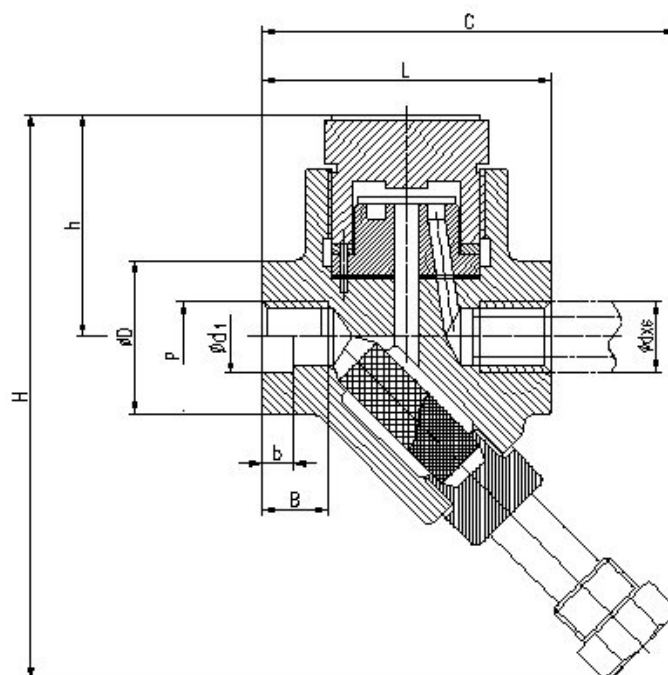

DN	L	H	øD	ød ₁	C	h	ø x s	masa weight kg
10 (3/8")	70	133	36	18	100	47	17,2x3,2	1,6
15 (1/2")	90	162	40	21,8	135	50	21,3x3,2	1,9
20 (3/4")	100	172	48	27,1	138	58	26,9x3,6	2,5
25 (1")	110	180	53	33,8	138	64	33,7x4	3,0