



Ravni odbojni ventil
Check valve

Type OV 1
(SB 2681)

PN 6

STANDARDNA IZVEDBA
STANDARD DESIGN

KUĆIŠTE
BODY

GG-25/ W.Nr. 0.6025
CAST IRON EN-JL 1040

UNUTARNJI DIJELOVI
INNER PARTS

NEHRĐAJUĆI ČELIK
STAINLESS STEEL

NAZIVNI OTVOR
NOMINAL DIAMETER

DN 15-200

NAZIVNI TLAK (bar)
NOMINAL PRESSURE

PN 6

TEMPERATURA
TEMPERATURE RANGE


DO 300°C
TO 300°C

SPAJANJE
CONNECTION

PRIRUBNICA DIN 2501
FLANGES



NAMJENA: VODA, PARA, ZRAK, INERTNI PLINOVI.

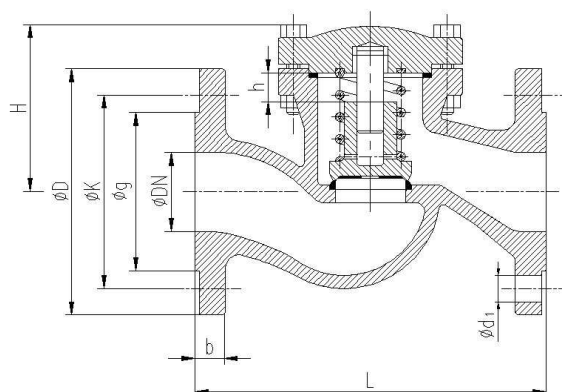

CONTENTS: WATER, STEAM, AIR, INERT GASES.

DN	L	H	øD	øK	ød ₁	n	masa weight kg
15	130	65	80	55	11	4	2,9
20	150	65	90	65	11	4	3,5
25	160	77	100	75	11	4	4,3
32	180	77	120	90	14	4	5,6
40	200	100	130	100	14	4	8
50	230	100	140	110	14	4	10
65	290	117	160	130	14	4	16
80	310	145	190	150	18	4	21
100	350	166	210	170	18	4	30
125	400	185	240	200	18	8	45
150	480	203	265	225	18	8	63
200	600	264	320	280	18	8	107